

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/IL05/000166

International filing date: 10 February 2005 (10.02.2005)

Document type: Certified copy of priority document

Document details: Country/Office: US  
Number: 10/776,163  
Filing date: 12 February 2004 (12.02.2004)

Date of receipt at the International Bureau: 17 March 2005 (17.03.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

09 MAR 2005

PA 1284716

# THE UNITED STATES OF AMERICA

**TO ALL TO WHOM THESE PRESENTS SHALL COME:**

**UNITED STATES DEPARTMENT OF COMMERCE**

**United States Patent and Trademark Office**

**February 17, 2005**

**THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM  
THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK  
OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT  
APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A  
FILING DATE UNDER 35 USC 111.**

**APPLICATION NUMBER: 10/776,163**

**FILING DATE: February 12, 2004**

**By Authority of the  
COMMISSIONER OF PATENTS AND TRADEMARKS**



*L. Edele*

**L. EDELEN  
Certifying Officer**

15915 U.S. PTO

Attorney's Docket No. 04016

Honorable Commissioner for Patents  
PO Box 1450  
Alexandria, VA 22313-1450

Sir:

Transmitted herewith for filing is a patent application of under 37 CFR 1.53(b):

INVENTOR(S): Ofer BEN-ZUR

TITLE: DIGITAL PRINTING MACHINE

☐ This application is being filed without the declaration of the inventor(s). Inventor information is as follows:

☐ This is a continuing application of prior Application No.

- ☐ Continuation
- ☐ Divisional
- ☐ Continuation-in-part

Enclosed are:

- ☒ Specification
- ☒ 10 Sheet(s) of drawings
- ☒ Oath or Declaration signed by the inventor(s)
  - ☒ Newly Executed
  - ☐ Copy of Oath or Declaration from a Prior Application
  - ☐ PLEASE DELETE the following inventor(s) named in the prior nonprovisional application:

☐ The inventor(s) to be deleted are set forth on a separate sheet attached hereto.

☐ If copy of Declaration filed, the entire disclosure of the prior application, from which a copy of the oath or declaration is supplied, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

- ☐ Microfiche Computer Program
- ☐ Nucleotide and/or Amino Acid Sequence Submission
- ☒ Assignee: Kornit Digital Ltd.
  - Assignment document is ☒ enclosed ☐ to be filed later.
- ☐ Convention priority is claimed on basis of
  - Certified copy ☐ is attached ☐ will be filed later
- ☐ Preliminary Amendment
- ☐ Information Disclosure Statement

Customer No.  
23338

PATENT AND TRADEMARK OFFICE

322856 U.S. PTO  
10/776163

021204

LAW OFFICES  
DENNISON, SCHULTZ, DOUGHERTY & MACDONALD  
SUITE 105  
1727 KING STREET  
ALEXANDRIA, VIRGINIA 22314-2700  
703 837-9600

The Filing Fee has been calculated as shown:

☐ PLEASE ENTER PRELIMINARY AMENDMENT PRIOR TO CALCULATING FILING FEE

		(Small Entity)	(Large Entity)
BASIC FEE		\$385	\$770
Total Claims	31-20= 11 X \$ 9=	99	X \$18 =
Indep. Claims	3-3= X \$43=		X \$86=
Multiple Dependent Claims Presented	+\$145=		+290=
TOTAL		\$484	\$

☒ A payment in the amount of \$ 524.00 is enclosed to cover:

☒ Filing Fee of \$ 484.00

☒ Assignment Recordation Fee of \$ 40.00

The payment is being made by:

☐ Deposit Account: Please charge Deposit Account No. \_\_\_\_\_.  
(A duplicate copy of this sheet is enclosed).


☐ Check: A check is enclosed.

☒ Credit card: A Credit Card Payment Form (PTO-2038) is attached hereto. The Commissioner is hereby authorized to charge payment of any additional filing fees required under 37 CFR 1.16 or any patent application processing fees under 37 CFR 1.17, or credit any over payment to the credit card account shown on the attached Credit Card Payment Form. Refund of all amounts overpaid, including those of twenty-five dollars or less, is specifically requested.

☒ The Commissioner is hereby authorized to charge payment of any additional filing fees required under 37 CFR 1.16 or any patent application processing fees under 37 CFR 1.17, or credit any over payment, to Deposit Account 04-0753. A duplicate copy of this sheet is enclosed.

PLEASE CONDUCT CORRESPONDENCE WITH THE UNDERSIGNED ATTORNEY.

Date: 2/12/04



Ira J. Schultz  
Reg. No. 28666

DENNISON, SCHULTZ, DOUGHERTY & MACDONALD  
1727 King Street  
Suite 105  
Alexandria, Virginia 22314-2700  
(703) 837-9600  
(703) 837-0980 (fax)

LAW OFFICES  
DENNISON, SCHULTZ, DOUGHERTY & MACDONALD  
SUITE 105  
1727 KING STREET  
ALEXANDRIA, VIRGINIA 22314-2700  
703 837-9600

## **DIGITAL PRINTING MACHINE FIELD OF THE INVENTION**

The present invention relates to apparatus for digital printing in general and,  
5 in particular, to a high-speed digital garment printing machine.

## **BACKGROUND OF THE INVENTION**

Garment printing is performed today by screen printing press machines that  
are complex, inflexible, and require a specific set-up for each different print and  
10 color. First, an image file undergoes a mechanical spot-color separation process  
(each color is printed in black and white on a separate sheet of paper or film). Then,  
the image is "developed" in a long optical process, into a fine mesh (screen), which  
is pressed during the printing process against the media. Before printing, each screen  
has to be set in the proper station and adjusted with reference to the other screens.  
15 Ink is transferred to the garment through the mesh by mechanical means (generally  
wiping a squeegee along the screen). Garment screen-printing technology requires a  
special press station for each color level. Print quality is limited due to the high  
registration requirements between stations; hence printing resolution is relatively  
low.

20 Garment presses are usually carousel machines based on up to 24 press  
stations. These machines occupy large floor area and are complex to service and  
maintain. Thus, conventional screen-printing technology is not cost effective for  
short run processes, especially for sample printing stages, although it is cost effective  
and fast for long run tasks.

25 An attempt has been made to provide a device for printing onto a portion of a  
substrate, such as a garment. US Patent 6,095,628 describes and claims an apparatus  
for ink jet printing pre-programmed viewable indicia onto a substrate. The apparatus  
is essentially a conventional ink jet printer, and is capable of creating the indicia  
through ink jet ink depositing upon flat or rigid substrates as a result of controlled  
30 platen movement beneath the ink jet printer head and controlled ink jet printer head  
movement and ink flow control by a programmed CPU. The flexible printing

substrate of the patented invention is larger than the platen and portions of the substrate are draped downwardly over edges of the platen and tucked under the platen.

Accordingly, there is a strong felt need for an efficient, fast, automated, digital garment printing machine which could provide high resolution, multicolor prints in a short lead-time.

### SUMMARY OF THE INVENTION

The present invention provides a digital printing machine permitting accurate, high resolution printing on a substrate with relatively high efficiency, for decoration of garments and other rigid or flexible substrates.

There is thus provided, in accordance with the present invention, a digital printing machine including a rigid frame, a first linear motion X axis stage mounted on the frame, a second linear motion X axis stage mounted on the frame parallel to the first axis stage, and arranged for operation independently of the first axis stage, a printing table assembly movable on each linear X axis stage, a linear motion Y axis stage mounted on the frame perpendicular to the linear X axis stages, above the printing table assemblies, and an array of inkjet nozzles mounted on the linear Y axis stage for linear motion perpendicular to the X axis stage.

According to one embodiment of the invention, each printing table assembly includes a media-holding plate and an openable cover pivotally coupled to the media-holding plate for holding the media firmly against the plate.

Further according to the invention, the printing machine further includes a curing unit located above each printing table assembly and arranged to cure ink on media on the printing table assembly.

Still further according to the invention, the printing machine further includes an ironing unit located above each printing table assembly and arranged to iron media on the printing table assembly before printing thereon.

There is also provided, according to the present invention, a printing machine including a rigid frame, a linear motion X axis stage mounted on the frame, a

printing table assembly movable on the linear X axis stage, a linear motion Y axis stage mounted on the frame perpendicular to the linear X axis stage, above the printing table assembly, an array of inkjet nozzles mounted on the linear Y axis stage for linear motion perpendicular to the X axis stage, a curing unit located above the printing table assembly and arranged to cure ink on media on the printing assembly, and an ironing unit located above the printing table assembly and arranged to iron media on the printing assembly before printing thereon.

According to one embodiment, the curing unit is an infrared system.

According to an alternative embodiment, the curing unit is a hot air blowing unit.

There is also provided according to the present invention a printing machine including a rigid frame, a linear motion X axis stage base mounted on the frame, a first printing table assembly movable on the linear X axis stage base, a second printing table assembly movable on the linear X axis stage base independently of the first printing table assembly, a linear motion Y axis stage mounted on the frame perpendicular to the linear X axis stages, above the printing table assemblies, and an array of inkjet nozzles mounted on the linear Y axis stage for linear motion perpendicular to the X axis stage.

## **BRIEF DESCRIPTION OF THE DRAWINGS**

The present invention will be further understood and appreciated from the following detailed description taken in conjunction with the drawings in which:

Fig. 1 is a perspective drawing of a garment printing machine constructed and operative in accordance with one embodiment of the present invention;

Fig. 2 is a side view of a garment printing machine constructed and operative in accordance with one embodiment of the present invention;

Fig. 3a, 3b, 3c are perspective drawings of a printing table system constructed and operative in accordance with one embodiment of the present invention;

Fig. 4 is a perspective drawing of an ironing unit constructed and operative in accordance with one embodiment of the present invention;

Fig. 5 is a schematic detail illustration of a portion of a printing heads array constructed and operative in accordance with one embodiment of the invention;

Figs. 6a, 6b, 6c and 6d are schematic illustrations of operation of the printing heads array of Fig. 5;

Figs. 7a, 7b and 7c are respective side, front and top views of a garment printing machine constructed and operative in accordance with second embodiment of the present invention; and

Fig. 8 is a side view drawing of a garment printing machine constructed and operative in accordance with third embodiment of the present invention.



## DETAILED DESCRIPTION OF THE INVENTION

The present invention relates to a digital printing machine for various substrates which permits accurate, high quality, high resolution, multi-color printing directly onto a substrate in a relatively simple machine. This is accomplished by incorporating an array of inkjet nozzles, such as drop-on-demand or continuous inkjet nozzles, automatic handling units and a curing system in a high speed computerized unit for the garment industry, in general, and for T-shirt printing, in particular. The machine further includes an accurate X,Y,Z motion system and a printing table. Since the printing machine is particularly suited to printing on a garment, it has been described herein with respect to garment printing, by way of example only. However, it will be appreciated that any other suitable substrate can alternatively be utilized.

A digital printing machine has the following advantages over conventional screen-printing devices:

- 15       • The image file is received in conventional format without the need for spot color separation process.
- No screen "development" process is needed.
- The transition from one job to another does not require replacement of screens, cleaning, etc.
- 20       • Printing flexibility: the image can be modified for each print. Variable data is printed at the same speed.
- The image can be printed in a variety of color levels.
- The machine occupies a smaller floor area.
- Higher printing resolution can be achieved.
- 25       • Printing files are stored efficiently in a way that eliminates the need for large screen storage area and screen cleaning processes.
- Printing directly onto a garment or textile obviates the need for transfer paper and an additional transfer step.

Referring now to Fig. 1, there is shown a schematic perspective drawing of a digital garment printing machine 10 constructed and operative in accordance with one embodiment of the present invention. Garment printing machine 10 is based on a rigid frame 12 in which an accurate linear motion X axis stage 14 is installed.

5 According to one embodiment, X-axis stage 14 is a linear motor driven stage, and can be a conventional linear stage. Alternatively, X-axis stage 14 can be any other type of linear stage, like a belt-driven stage, or ball screw driven stage. A printing table assembly 16 is connected to X axis stage 14, which preferably provides high acceleration and scanning speed.

10 Perpendicular to the X axis direction, an accurate linear motion Y axis stage 18 is installed above printing table assembly 16, preferably on a bridge 13. Stages X and Y can be known-in-the-art linear stages, including linear rails, like rails marketed by THK Co., Ltd., Tokyo, Japan, a linear encoder like that sold by RSF

15 According to a preferred embodiment of the invention, the X axis stage 14 is a linear motor driven stage, capable of high acceleration rate and stiffness, for example, Anorad brand model LW10 of Rockwell Automation, Shirley, New York, USA. Closed loop control is responsible for the high accuracy and motion smoothness. The position of the printing table 16 along the rails of X axis stage 14 is measured by a  
20 linear encoder, and is used also to determine the firing timing of the inkjet nozzles. Y axis stage 18 is preferably a linear motor stage similar to X axis stage 14.

A printing heads array 20, including a plurality of inkjet nozzles, is connected to a vertical Z-axis system 22, which is preferably a ball screw driven stage. Z axis stage 22 is supported on Y-axis moving plate 19, to allow motion perpendicular to  
25 the direction of movement of printing table 16. The gap between heads array 20 and media on printing table assembly 16 is an important parameter for high quality printing. Z stage 22 enables movement of printing heads array 20 in the vertical direction for calibration for different media heights. It will be appreciated that, while the machine is particularly suited for printing on a finished garment, other media can

alternatively be employed. The present invention will be described with regard to a finished garment, for ease of description by way of example.

Referring now to Fig. 2, an ironing unit 24 is supported on frame 12 above X axis stage 14, preferably on a bridge, such that printing table assembly 16 can move underneath. The ironing unit 24 prepares the media for printing, as will be further explained in detail below. Another unit supported on frame 12 is the curing unit 26. According to one embodiment, curing unit 26 is an infrared heating unit that evaporates the ink carrier as printing is accomplished or during print passes. According to another embodiment, curing unit 26 can be a hot air blower. Alternatively, any other curing unit can be utilized, which is suited to the type of ink printed on the garment.

A main computer 40, preferably a microprocessor, controls the entire system, and is coupled to each of the various units for coordination, synchronization, and activation, in accordance with a pre-programmed printing process. Main computer 40 coordinates a large number of functions. It receives images from an image file, processes the images to be printed, activates the curing unit, and controls the motion systems, the ironing unit, and more. Preferably, movement of the X and Y axis stages is coordinated by the microprocessor with the nozzles firing command by a print heads controller, so that precise printing of a desired object or symbol can be performed.

A printing table assembly 60 constructed and operative in accordance with one embodiment of the present invention is shown in Figs. 3a, 3b and 3c. Printing table assembly 60 includes a media-holding plate 61 and an openable cover 64. Preferably, media-holding plate 61 includes a raised portion 62 of the same size as the image to be printed, and cover 64 includes a window 65 of the same shape as raised portion 62. Preferably, the window 65 is slightly larger in size, preferably a few millimeters, than raised portion 62.

Referring to Fig 3a, cover 64 is held in an open position by two gas cylinders 66, as known in the industry. Preferably, at least part of the printing table assembly,

for example the raised portion 62, is a vacuum table, to allow holding of non-porous media such as paper, boards, plastic etc.

Fig. 3b shows a garment 68 loaded onto table assembly 60. Garment 68 is loaded manually onto plate 61, as the plate's chamfers 72 center the garment on the plate. As can be seen in Fig 3c, after garment 68 is loaded onto table assembly 60, cover 64 is closed against plate 61, while gas cylinders 66 urge the cover to the closed orientation. The edges of the garment are stretched slightly by the cover surface that touches the table lower surface around the raised portion 62. As a result, the garment is held firmly in place to allow high resolution printing (i.e., there is substantially no movement of the media during printing or wrinkling).

According to another embodiment of this invention, printing table assembly is a simple, flattened plate, made of aluminum or wood on which a textile piece or a garment is positioned. Flattened plates are well known by those who are familiar with the garment printing industry.

After garment 68 is loaded, the printing table assembly may be moved to a position below the ironing unit. As can be seen in Fig. 4, ironing unit 30 is built from a heatable plate 32 supported on a frame 34 including means for vertical movement of the plate 32. In the illustrated embodiment, frame 34 is carried by two air pistons 36, which are well known in the industry. Heatable plate 32 is preferably a Teflon-coated stainless steel plate, heated, for example, by a strip heater 38, such as that sold by Minco Products, Inc., Minnesota, USA. Air pistons 36 are controlled by controller 40, and move downward, thereby providing contact of the heatable plate with the media on the printing table assembly. Now, printing table assembly 60 is moved, thereby sliding garment 68 beneath heatable plate 32, allowing ironing of garment 68 by the ironing unit. After ironing, garment 68 is flat, dry and ready for the high resolution printing process.

Garment printing machine 10 also includes an array 50 of printing heads 52, shown schematically in Fig. 5, arranged for printing directly on a finished garment, a textile piece or other flexible or rigid medium. Printing heads array 50 includes a plurality of printing heads 52 including inkjet nozzles 54. Printing heads 52 can be

any conventional printing heads, such as those marketed by Spectra, Inc., New Hampshire, USA and others known in the industry.

According to one preferred embodiment of the invention, printing heads array 50 is a massive array of conventional piezoelectric drop-on-demand or continuous inkjet heads, which perform the high-speed printing. It is a particular feature of the present invention that at least a 500, and preferably several thousands (i.e., 2,000) nozzles are provided for simultaneous printing, resulting in a very quick and accurate process. Each head 52 consists of dozens of nozzles 54 which are controlled independently by main computer 40.

According to a preferred embodiment, the distances between nozzles and between printing heads are bigger than the printing resolution, hence several print passes are needed to complete the image, as shown schematically in Figs. 6a, 6b, 6c and 6d. Figs. 6a to 6d are schematic detail illustrations of a single print head 52 and a portion of the media 56 to be printed. After each pass in the X-axis, here created by movement of the printing table assembly with media 56, the printing head 52 moves incrementally in the Y-axis to prepare for the next pass. It will be appreciated that the computer 40 is programmed to control the relative motion of the printing heads and the printing table assembly so as to obtain this accurate and complete coverage.

The printing process is performed while relative motion occurs between the printing heads array 50 and printing table assembly 60. At least two axes of motion are needed for this multi-color printing: X axis motion that is in the printing direction; and Y axis motion that is perpendicular to the printing direction. As stated above, the distances between nozzles and between printing heads are bigger than the printing resolution, hence several print passes are needed to complete the image. This is accomplished by moving the printing table assembly 60 back and forth along the X axis while moving the heads array 50 perpendicular to the line of printing. The X-axis is the printing line and the Y-axis is the line on which the printing heads array moves after each pass to fill the gaps between printed lines in the next pass. Multi-color printing is performed as the table surface passes below the drop-on-demand inkjet nozzles array.

According to an alternative embodiment of the invention, the Y axis is the fast-moving axis, while the X axis moves incrementally to permit filling in of the gaps between printed lines.

5 A printing command is sent by the printing heads driver (not shown) to each nozzle at the exact time and location for ink firing. The printing command is actually an electronic pulse, with exact width, voltage level, rise time and decay time. Printing heads drivers are commercial systems known in the industry, such as Inca drivers, of IncaDigital Printers, Cambridge, England. When printing is completed, the printing table is moved to a loading position. Then, the printed garment is  
10 unloaded and a new garment is loaded onto the printing table.

The printing machine of the embodiments described above incorporates two processes, one after the other:

1. Loading and un-loading garments.

2. The printing process itself.

15 In order to increase the throughput of the machine, both these processes can be performed in parallel, as seen in the following embodiments of the invention.

Referring now to Figs. 7a, 7b and 7c, respective side, front and top views of a second embodiment of the invention 110 are presented. Frame 112 is wider than frame 12 shown in Fig. 1, and two independent X linear axis stages 114 are installed  
20 instead of one X axis stage, as in the first embodiment. Y axis stage 118 is substantially the same as Y axis stage 18 in Fig. 1. Machine 110 has also two curing units 126, two ironing units 124 and two printing table assemblies 160. It is a particular feature of the present embodiment that the X axis stages operate independently from one another. Thus, the process of loading and un-loading can be  
25 carried out on one printing assembly at the same time that printing is being carried out on the second printing assembly. As a result, the printing heads array is working substantially continuously, dramatically improving throughput of the machine. Each table can be accessed from the same edge of the machine, thereby permitting a single worker to operate two printing assemblies. Main computer 140 controls both X axis  
30 stages for independent operation.

Referring now to Fig. 8, a side view of a printing machine 210 according to a third embodiment is presented. Frame 212 is the same as frame 12 shown in Fig. 1. Machine 210 has two independently movable printing table assemblies 260 moving on the base of the same X axis stage. As in a railway with two trains running on the same track, printing table assemblies 260 move back and forth along a single base or track, independently of one another. Printing is performed on one table while at the same time garments are unloaded and loaded on the second table. Each table is accessed from the opposite edge of the machine, and is loaded and unloaded by a different operator. Main computer 240 controls both printing tables.

It will be appreciated that the invention is not limited to what has been described hereinabove merely by way of example. Rather, the invention is limited solely by the claims that follow.

## CLAIMS

1. A digital printing machine comprising:

a rigid frame;

5 a first linear motion X axis stage mounted on said frame;

a second linear motion X axis stage mounted on said frame parallel to said first axis stage, and arranged for operation independently of said first axis stage;

a printing table assembly movable on each said linear X axis stage;

10 a linear motion Y axis stage mounted on said frame perpendicular to said linear X axis stages, above said printing table assemblies; and

an array of inkjet nozzles mounted on said linear Y axis stage for linear motion perpendicular to said X axis stage.

2. The printing machine of claim 1, wherein each said printing table  
15 assembly comprises a media-holding plate and an openable cover pivotally coupled to said media-holding plate for holding said media firmly against said plate.

3. The printing machine according to claim 2, wherein said media-  
holding plate includes a raised portion, and said cover includes a window of the same  
20 shape and slightly larger than said raised portion.

4. The printing machine according to claim 1, wherein said linear motion  
X axis stage is a linear motor driven stage.

25 5. The printing machine according to claim 1, wherein said linear motion  
Y axis stage is a linear motor driven stage.

6. The printing machine according to claim 1, where at least part of each  
said printing table assembly is a vacuum table.

30



7. The printing machine according to claim 1, wherein said inkjet nozzles include drop-on-demand piezoelectric inkjet nozzles.

8. The printing machine according to claim 1, wherein said inkjet nozzles include continuous piezoelectric inkjet nozzles.

9. The printing machine according to claim 1, further comprising a curing unit located above each said printing table assembly and arranged to cure ink on media on said printing table assembly.

10. The printing machine according to claim 9, wherein said curing unit is an infrared system.

11. The printing machine according to claim 9, wherein said curing unit is a hot air blowing unit.

12. The printing machine according to claim 1, further comprising an ironing unit located above each said printing table assembly and arranged to iron media on said printing table assembly.

13. A printing machine comprising:  
a rigid frame;  
a linear motion X axis stage mounted on said frame;  
a printing table assembly movable on said linear X axis stage;  
a linear motion Y axis stage mounted on said frame perpendicular to said linear X axis stage, above said printing table assembly;  
an array of inkjet nozzles mounted on said linear Y axis stage for linear motion perpendicular to said X axis stage;  
a curing unit located above said printing table assembly and arranged to cure ink on media on said printing assembly; and

an ironing unit located above said printing table assembly and arranged to iron media on said printing assembly before printing thereon.

14. The printing machine according to claim 13, wherein said curing unit is an infrared system.

15. The printing machine according to claim 13, wherein said curing unit is a hot air blowing unit.

16. The printing machine according to claim 13, wherein said printing table assembly comprises a media-holding plate and an openable cover pivotally coupled to said media-holding plate for holding said media firmly against said plate

17. The printing machine according to claim 16, wherein said media-holding plate includes a raised portion, and said cover includes a window of the same shape and slightly larger than said raised portion.

18. The printing machine according to claim 13, where at least part of said printing table assembly is a vacuum table.

20

19. The printing machine according to claim 13, wherein said printing table assembly is a flattened plate.

20. The printing machine according to claim 13, wherein said inkjet nozzles include drop-on-demand piezoelectric inkjet nozzles.

25

21. The printing machine according to claim 13, wherein said inkjet nozzles include continuous piezoelectric inkjet nozzles.

22. A printing machine comprising:

30

a rigid frame;

a linear motion X axis stage base mounted on said frame;

a first printing table assembly movable on said linear X axis stage base;

5 a second printing table assembly movable on said linear X axis stage base  
independently of said first printing table assembly;

a linear motion Y axis stage mounted on said frame perpendicular to said  
linear X axis stages, above said printing table assemblies; and

an array of inkjet nozzles mounted on said linear Y axis stage for linear  
motion perpendicular to said X axis stage.

10

23. The printing machine of claim 22, further comprising an ironing unit  
located above said printing table assemblies and arranged to iron media on said  
printing table assemblies.

15 24. The printing machine according to claim 22, further comprising a  
curing unit located above said printing table assemblies and arranged to cure ink on  
media on said printing table assemblies.

20 25. The printing machine according to claim 24, wherein said curing unit is  
an infrared system.

26. The printing machine according to claim 24, wherein said curing unit is  
a hot air blower.

25 27. The printing machine of claim 22, wherein said printing table assembly  
comprises a media-holding plate and an openable cover pivotally coupled to said  
media-holding plate for holding said media firmly against said plate.

28. The printing machine of claim 27, wherein said media-holding plate includes a raised portion, and said cover includes a window of the same shape and slightly larger than said raised portion.

5           29. The printing machine according to claim 22, where at least part of each printing table assembly is a vacuum table.

30. The printing machine according to claim 22, wherein said inkjet nozzles include drop-on-demand piezoelectric inkjet nozzles.

10

31. The printing machine according to claim 22, wherein said inkjet nozzles include continuous piezoelectric inkjet nozzles.

## ABSTRACT

A digital printing machine including a rigid frame, a first linear motion X axis stage mounted on the frame, a printing table assembly movable on each linear X axis stage, a linear motion Y axis stage mounted on the frame perpendicular to the linear X axis stages, above the printing table assemblies, and an array of inkjet nozzles mounted on the linear Y axis stage for linear motion perpendicular to the X axis stage. The printing machine may include a second linear motion X axis stage mounted on the frame parallel to the first axis stage and arranged for operation independently of the first axis stage, and/or a curing unit located above the printing table assembly and arranged to cure ink on media on the printing table assembly and/or an ironing unit located above the printing table assembly and arranged to iron media on the printing assembly before printing thereon, or a first printing table assembly movable on the base of the linear X axis stage and a second printing table assembly movable on the linear X axis stage base independently of the first printing table assembly.

Attorney Docket Number:

## DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION

As a below named Inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which patent is sought on the invention entitled:

### DIGITAL PRINTING MACHINE

the specification of which

☐ is attached hereto OR ☐ was filed on \_\_\_\_\_ as United States Application Number \_\_\_\_\_ or PCT International Application Number \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application No.	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Claimed		Certified Copy Attached	
			Yes	No	Yes	No
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. or PCT Parent Application No.	Parent Filing Date (MM/DD/YYYY)	Parent Patent No. (if applicable)

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Donald L. Dennison Reg. No. 19920 David E. Dougherty Reg. No. 19576 Amir H. Behnia Reg. No. 50215  
Ira J. Schultz Reg. No. 28666 Malcolm J. MacDonald Reg. No. 40250

Direct all correspondence to:

Direct telephone calls to:

**DENNISON, SCHULTZ & DOUGHERTY**  
1745 Jefferson Davis Highway, Suite 612  
Arlington, VA 22202-3417

(703) 412-1155, Ext.  
Facsimile: (703) 412-1161

**\*23338\***

**23338**

US PATENT AND TRADEMARK OFFICE

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or Imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor: **Ofer BEN-ZUR**

Inventor's Signature: *Ofer Ben-Zur*  
Residence: **1 Harduf Street, Raanana 43220, Israel**  
Post Office Address: **1 Harduf Street, Raanana 43220, Israel**

Date: *2 Feb. 2004*  
Citizenship: **Israel**

Name of Second Inventor:

Inventor's Signature: \_\_\_\_\_  
Residence: \_\_\_\_\_  
Post Office Address: \_\_\_\_\_

Date: \_\_\_\_\_  
Citizenship: \_\_\_\_\_

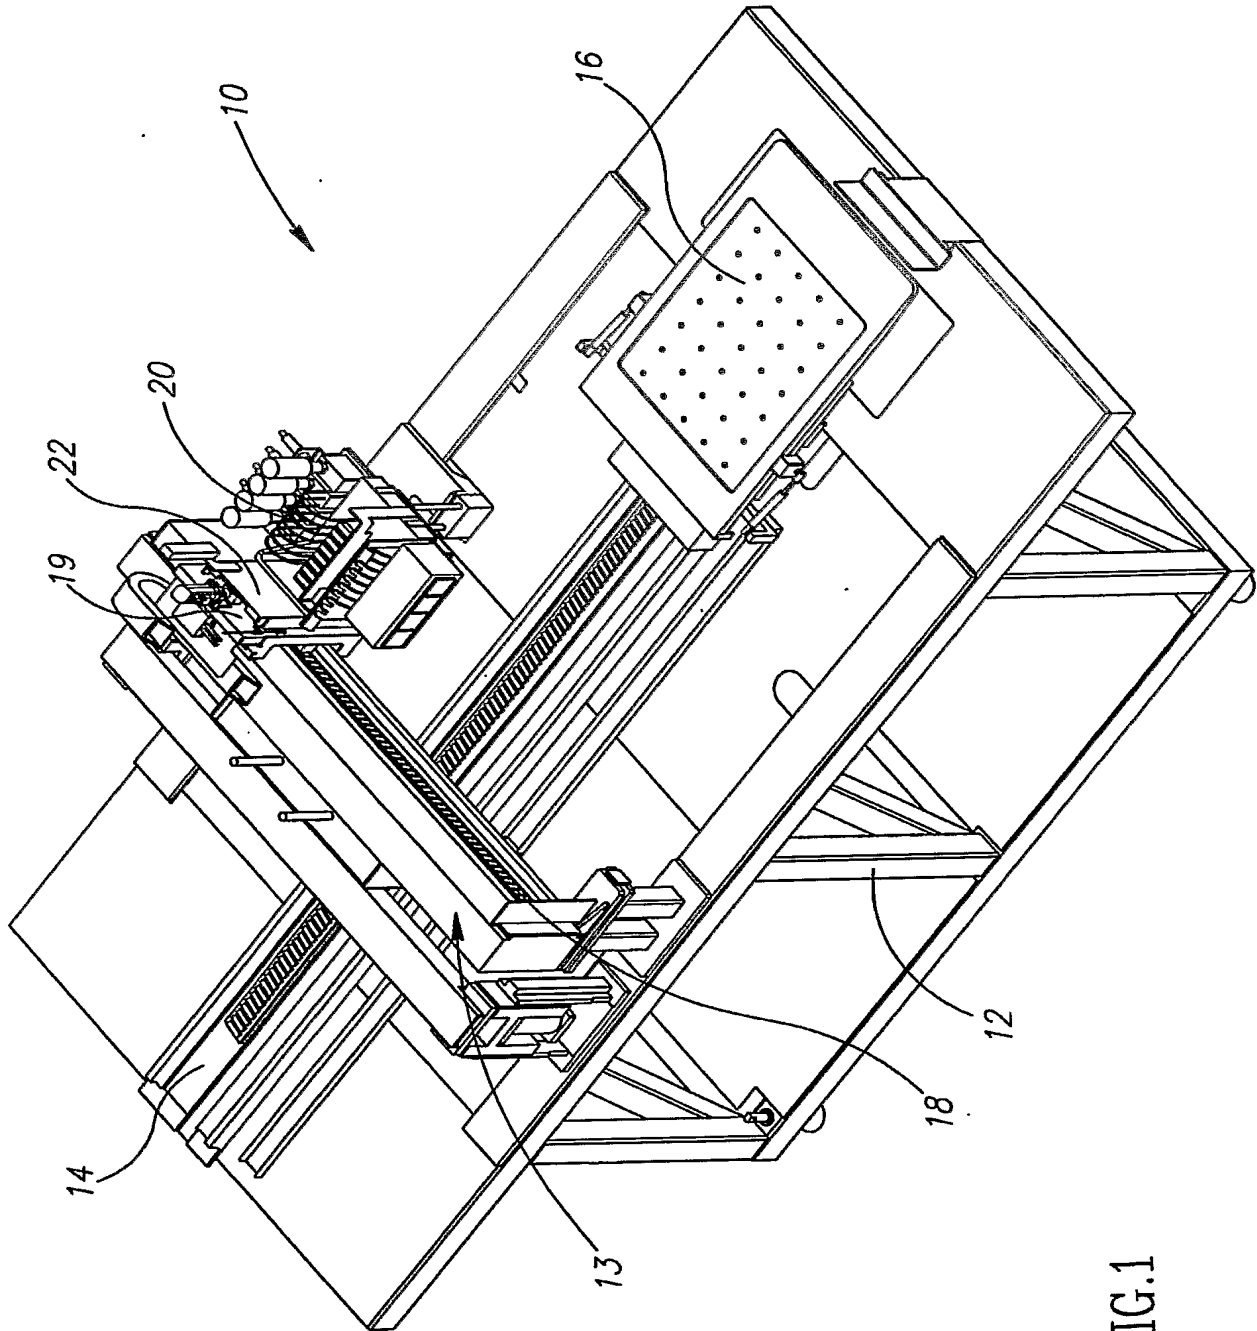


FIG.1

2/10

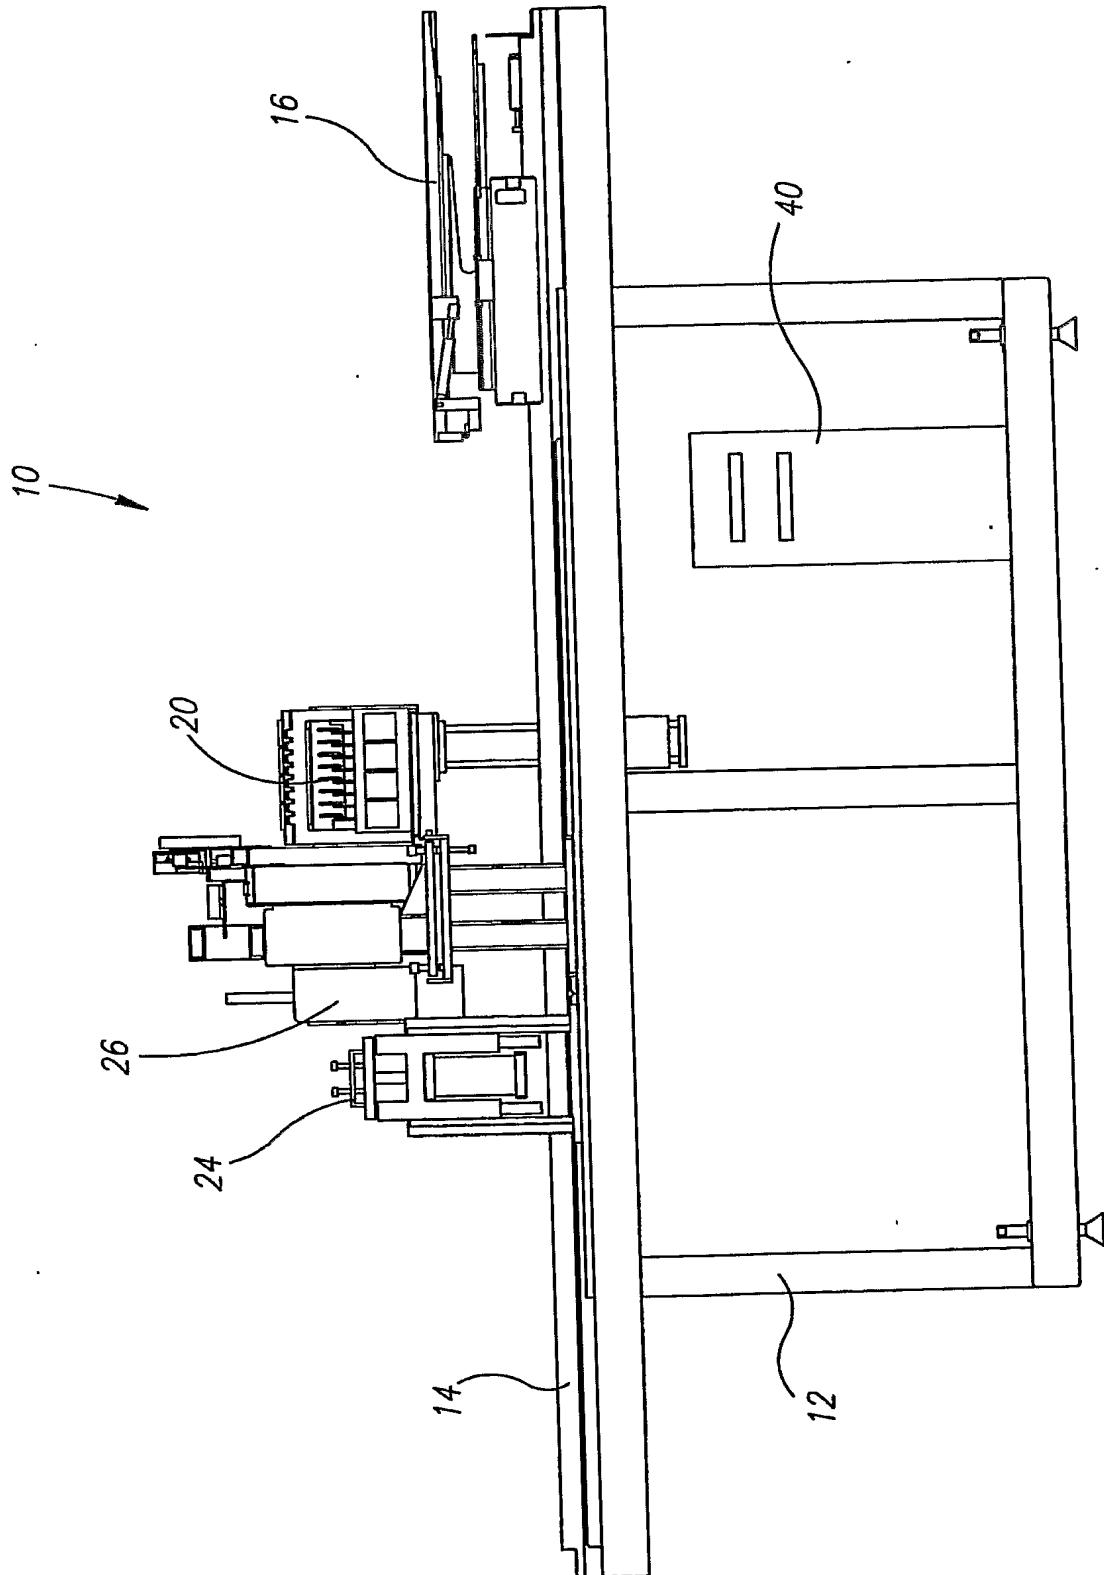


FIG. 2



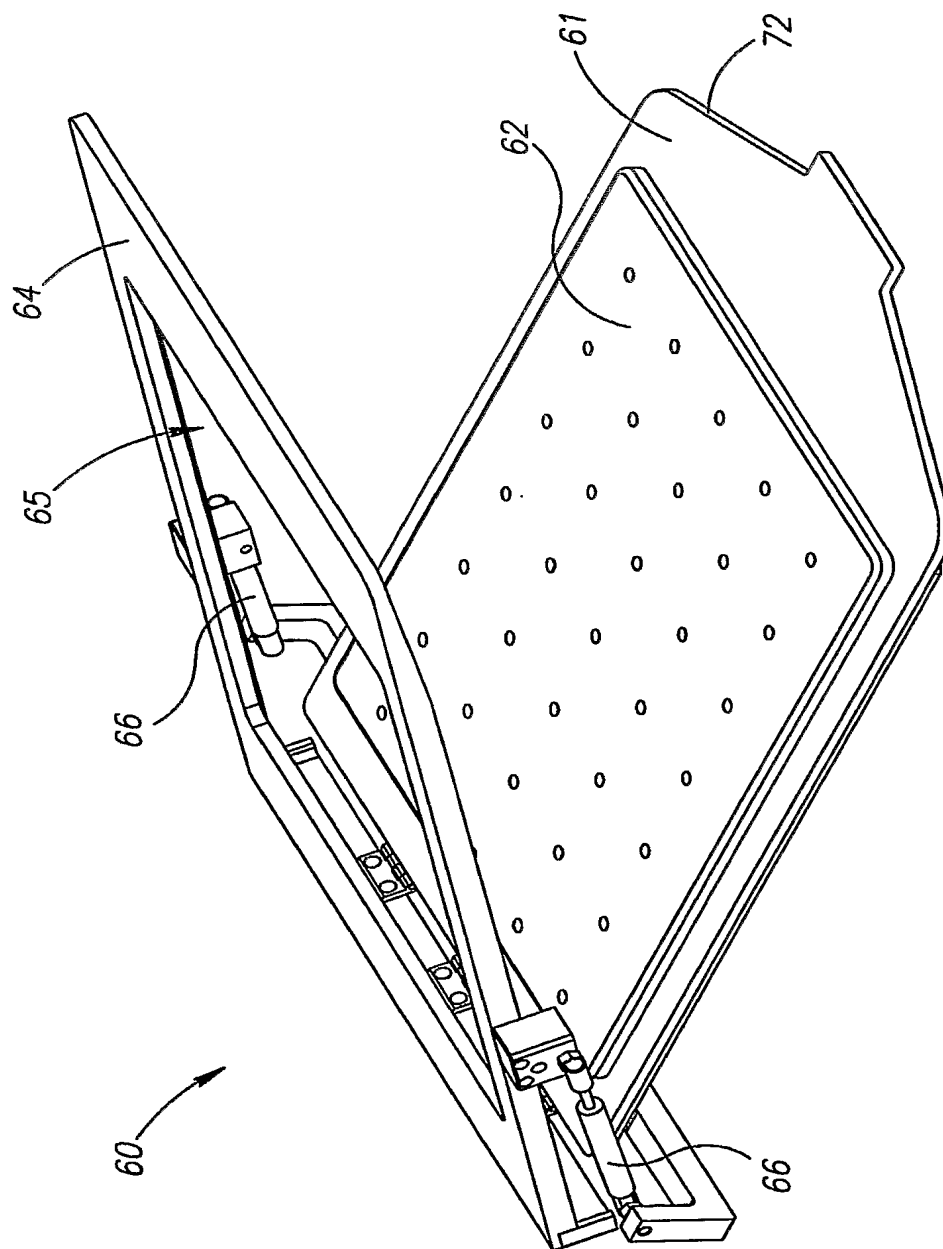


FIG. 3A

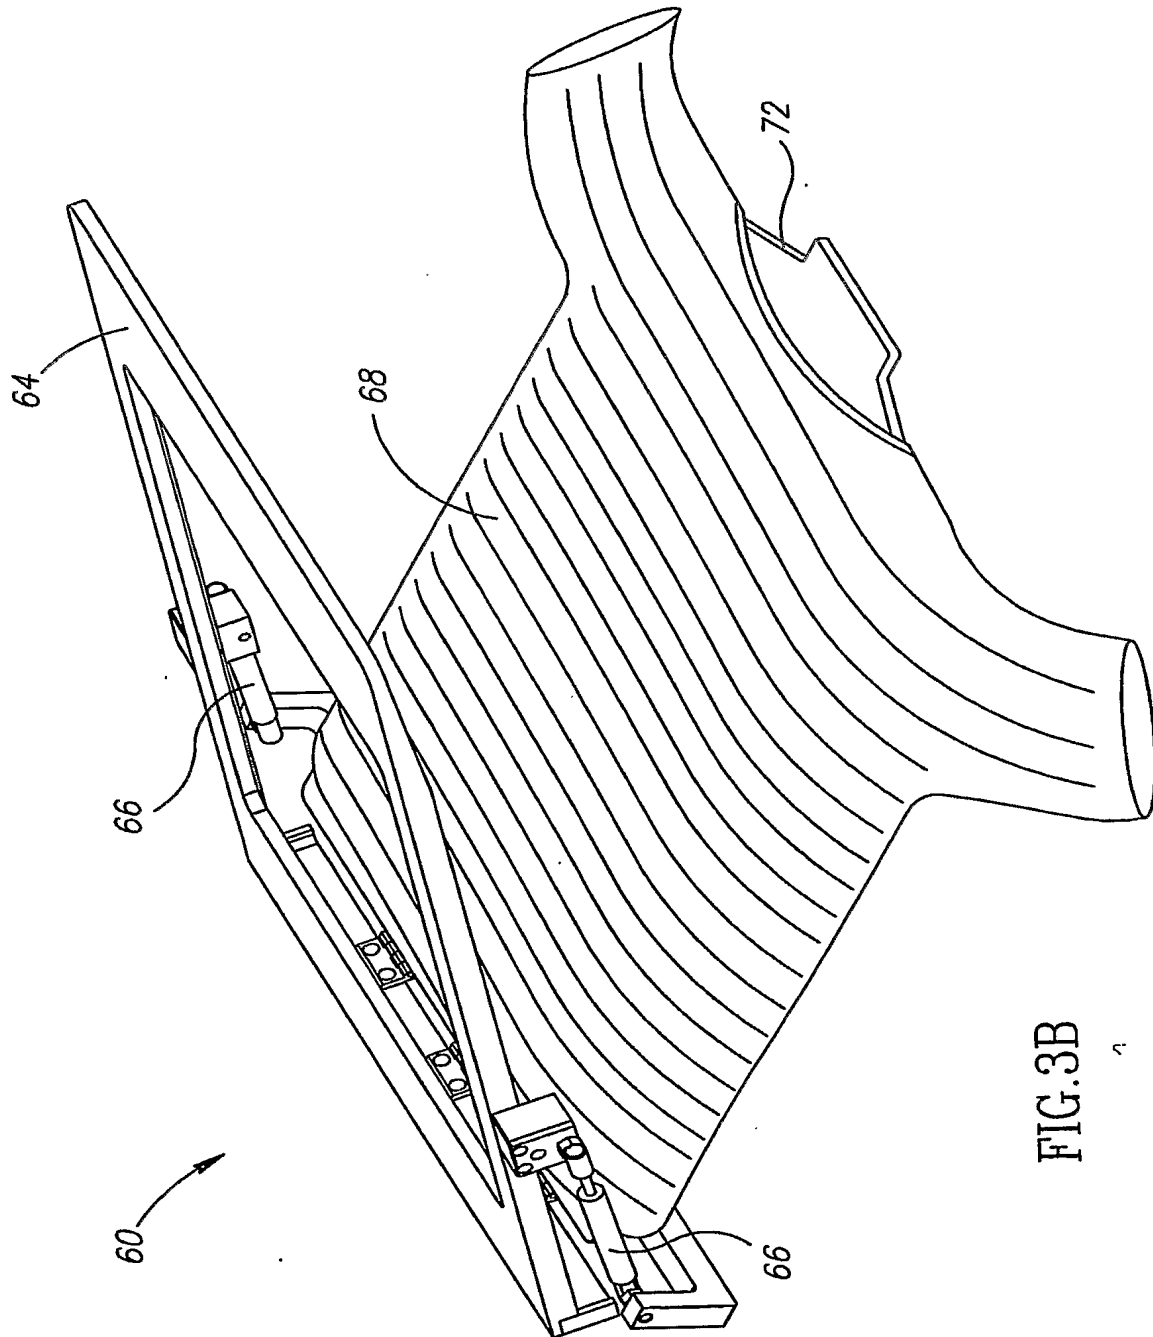


FIG. 3B

5/10

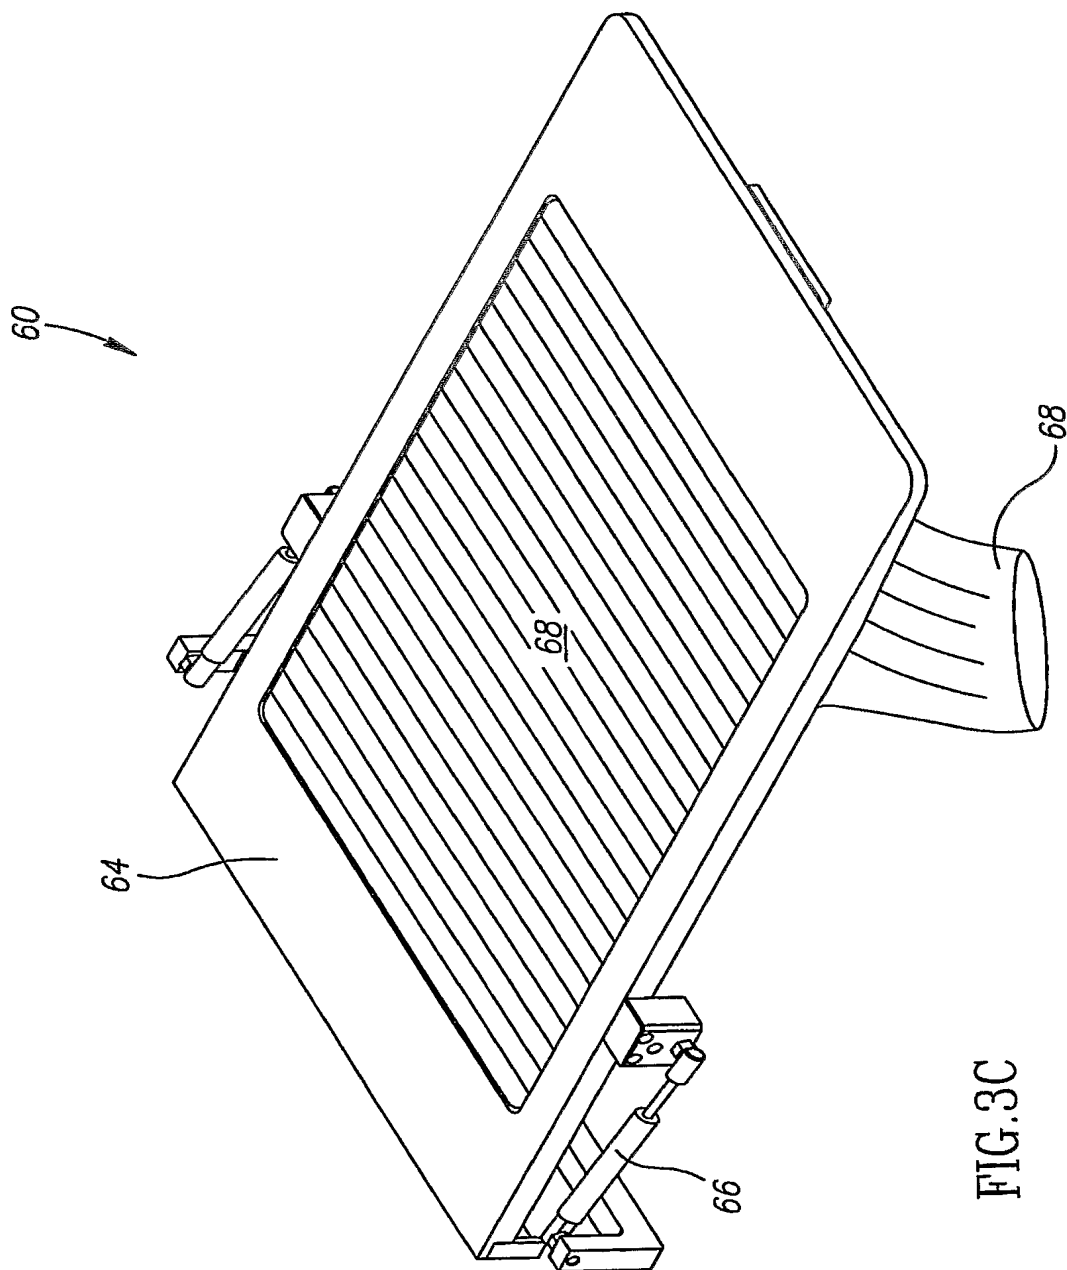
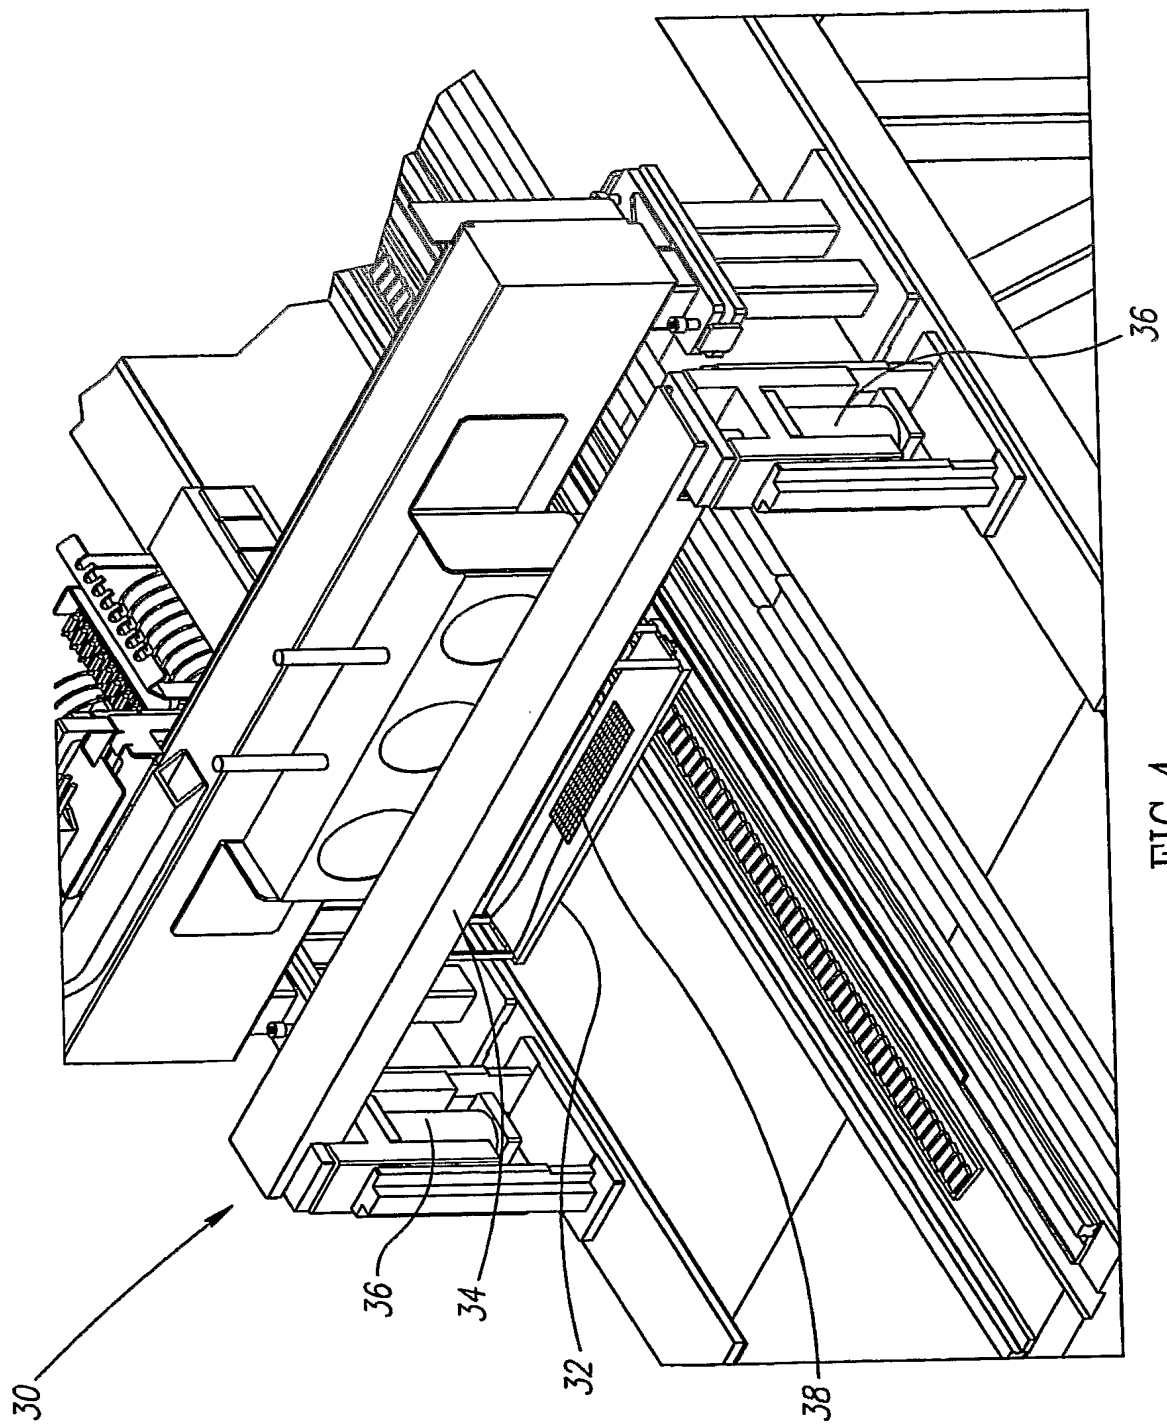


FIG. 3C



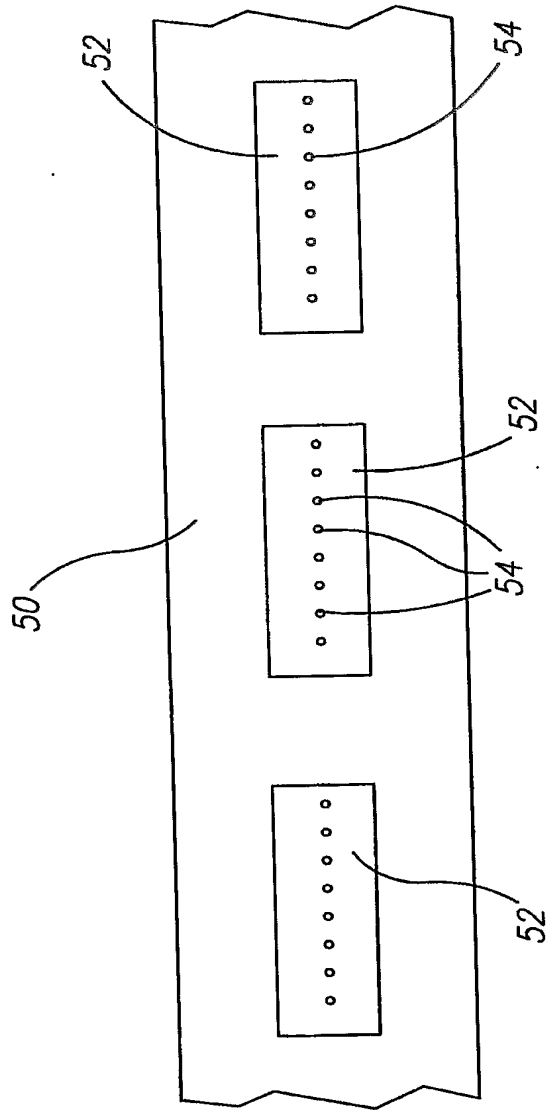


FIG. 5

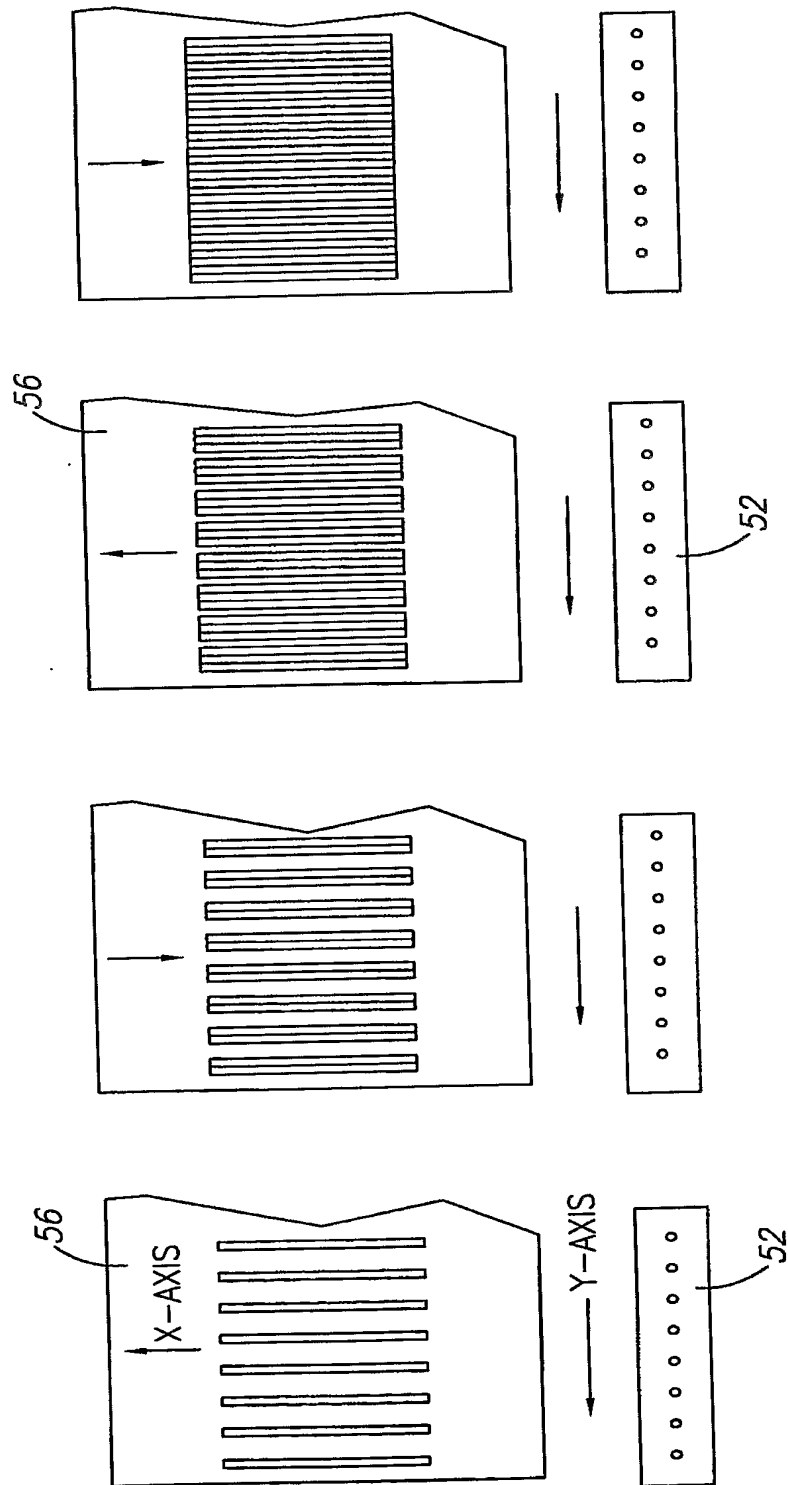


FIG. 6D

FIG. 6C

FIG. 6B

FIG. 6A

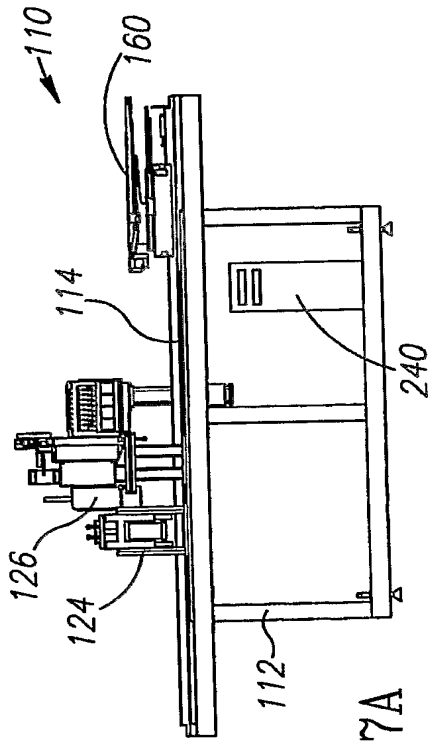


FIG. 7A

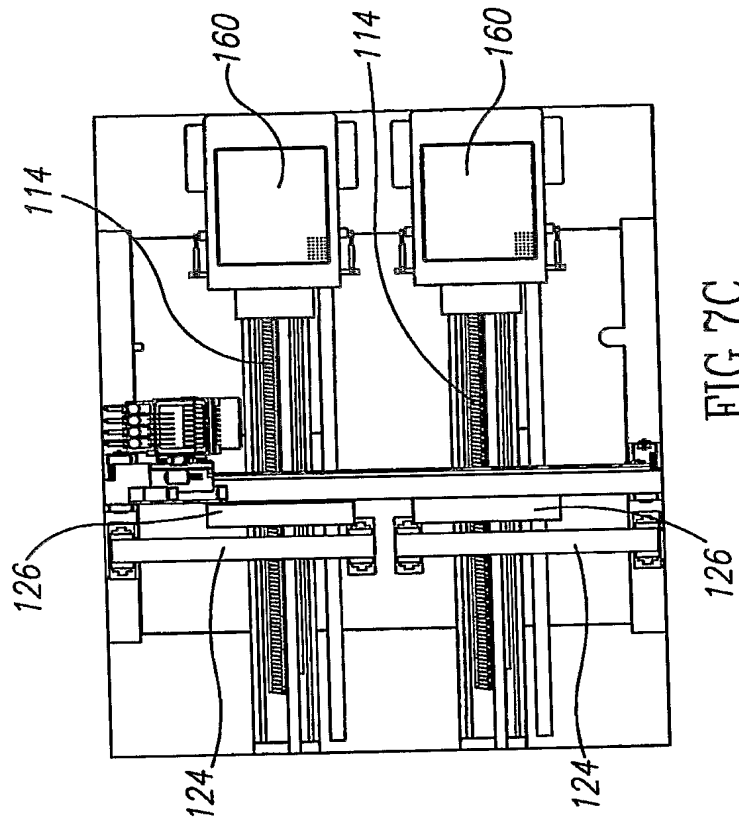


FIG. 7C

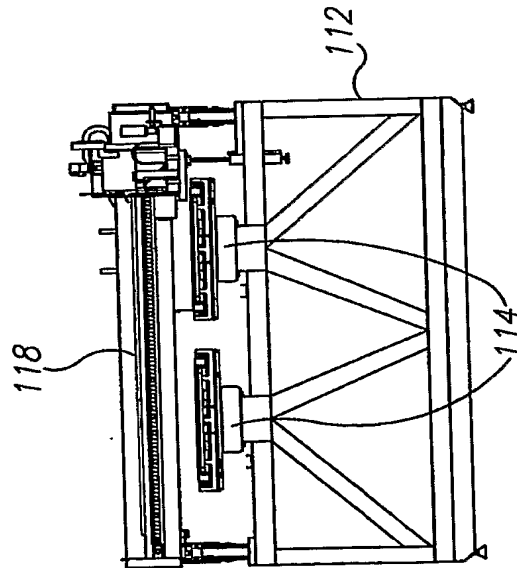


FIG. 7B

10/10

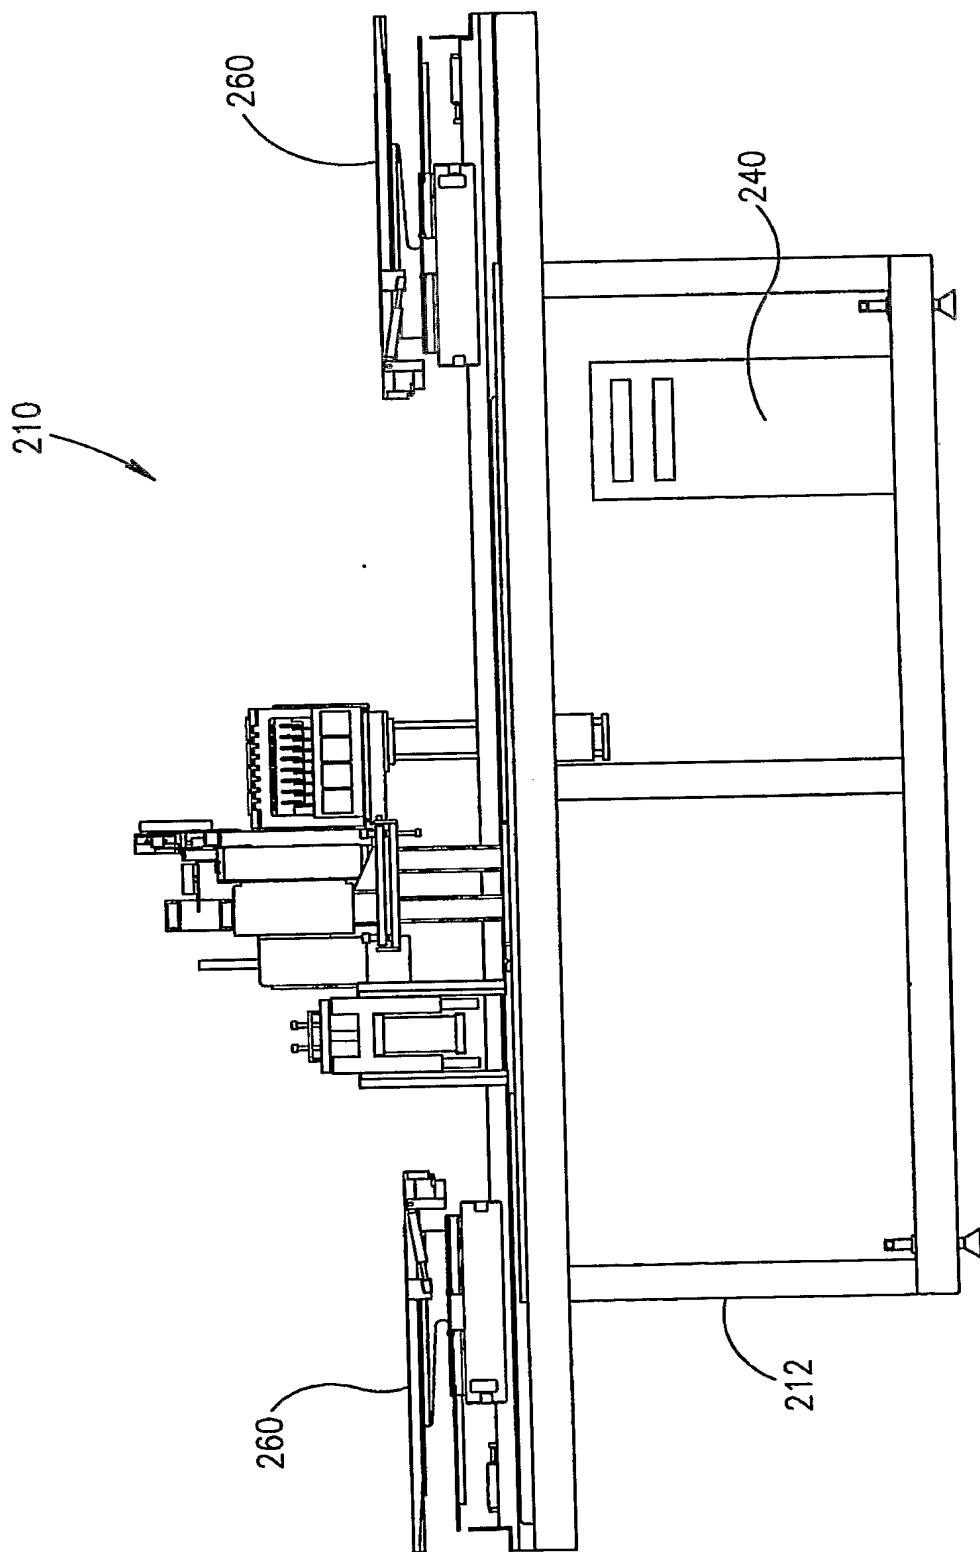


FIG.8